



anyone — anytime — anywhere



**FARFISA**

INTERCOMS SINCE 1967





*Welcome to*



**IP EVO**  
smarter living

**FARFISA**

# FARFISA

INTERCOMS SINCE 1967

## Our History

**Over 60 years of experience and responsibility,** continuously innovating for the future while working alongside our customers and long-standing partners. Farfisa has grown into a trusted brand, built on quality and a commitment being truly Made in Italy. **A strong, reliable partner at every level.**

## Technology Products Services

Farfisa stands for **cutting-edge technology, high-quality products and complete solutions within the video door entry sector.** Designed to meet the demands of modern living, our systems combine functionality, comfort and flexibility, for all sizes, from individual installations to large residential developments. With a focus on design, performance and reliability, our systems **are proudly Made in Italy.**





## Global Markets

Our production and R&D is based in our factory, supported by a strong network of local suppliers. **Our products are used in over 60 countries worldwide. Our dedicated Technical Support, Marketing, Sales and Customer Service Teams** ensure we understand and respond to the specific needs of each market we operate in.

**#strongertogether**

Farfisa is committed to being a dedicated and reliable partner, offering personalised support through meetings, webinars and training sessions. We provide a wide range of digital tools via our website, include technical data sheets, manuals, installation guides, tutorial videos and product literature. **Working together to learn, deliver and grow.**



# Sustainability

We are committed to reducing our environmental impact through responsible design, efficient production, and long-term product performance.

**Max energy**  
self-produced per year  
→ **121.034 kWh**




**Energy produced**  
since 2011  
→ **1.613.043,20 kWh**  
annual value produced  
→ **111.854 kWh**



**CO<sub>2</sub>**  
**footprint**



**CO<sub>2</sub> emissions avoided**  
since 2011  
→ **856.525,94 kg**  
annual value  
→ **59.394 kg**



**Equivalent trees**  
since 2011  
→ **111.348**  
annual value  
→ **7.721**



**Litres of oil avoided**  
since 2011  
→ **351.551,25 l**  
annual value  
→ **24.378 l**



## Remote support

For the IP EVO System, **updates, diagnostics, configuration changes**, and technical support can all be carried out **remotely** - removing the need for on-site visits. This approach reduces time, costs and helps minimise the environmental impact.



## Virtual systems

Sustainability also means **limiting the production** of physical components whenever possible. By adopting software, apps, and virtual systems, functions traditionally handled by hardware devices can be replaced, leading to lower consumption of materials and resources.

## Products durability

Our products are made to last. Every stage of development - from design and component selection to assembly and final testing - **is carefully managed to ensure longevity.**

## Accessibility

All Farfisa products are developed with the user at the heart. We focus on creating solutions that are simple, safe, and intuitive to use. From materials and ergonomics to system design, we ensure our products are accessible and inclusive - suitable for all ages, cultures and environments.

## Packaging


70% of our products are **EPS-free** (free from polystyrene) and we continuously work to improve and optimise our packaging to make it more sustainable. We aim to minimise printed materials, but where necessary, we prefer **FSC paper** to support responsible forest management.

## Spare parts availability

We ensure the availability of spare parts for at least 10 years, in order to allow for any repairs.



EPS  
free



YEARS OF SPARE PARTS AVAILABILITY



# Welcome to





The IP Evo System is ideal for multi-user developments as well as small to medium installations. It introduces an innovative approach to the video intercom market, using **WebRTC protocol** to deliver exceptional audio and video quality. The system is **extremely easy to manage and operate**, requiring no IT skills for configuration or installation.

Offering a range of benefits for installers, system managers and end users; including **ultra high definition video**, crystal-clear audio with no echo, delay or latency, and straightforward setup and configuration.

Full remote system management is supported, along with a dedicated chip for image encryption and AWS (Amazon Web Services) cloud server developed and managed by Farfisa, ensuring a high level of **cybersecurity**.

The system is designed to **ensure operation even when no network connection** is available.




EASY SETUP



MULTI-USER COMPLEXES



WEBRTC PROTOCOL



PEER TO PEER / NO SERVER



FTP, UTP, OPTICAL FIBER

**High performances**



TOP AUDIO VIDEO



ALWAYS ON



REMOTE MANAGEMENT



5MPX OPTIC

**Accessibility**



AUDIO/VISUAL SIGNALLING



MULTI-LANGUAGE VOICE PROMPT



WIDE ANGLE CAMERA



BRAILLE

**Cybersecurity**



POWERED BY AWS



MASKED PASSWORD



DATA ENCRYPTION

**Robustness**




TORX SCREWS



STAINLESS STEEL

# Call forward

Many different ways to forward the call from the door station to the apartment or user:



**PUSH BUTTON**



**KEYPAD**



**ADDRESS DIRECTORY**



# Access to building

Many options for access, to have an easy, safe and quick operation:



**RFID**



**QR CODE**



**APP**



**PIN CODE**

# App



The **IP EVO app** is designed to maximise accessibility and support all user types. Ease of use, clarity and simplicity are the core principles guiding its development. Flexible and versatile, it is built to serve three key user groups: installers, system managers, and end users. The app simplifies every stage of the process, from installation and system configuration through to ongoing management and daily use. **It also enables remote diagnostics, maintenance and software updates.**



After installing the door station and the video internal units, **the installer** uses the app to configure the system and assign users.



Through the app, the **system manager** can update the system over time, adding or replacing users and implementing new features as required.



The **end user** relies on the IP EVO app to communicate with door stations, manage access, and activate external cameras for video surveillance.



**App IP EVO  
available for iOS  
and Android**

# Advantages for the installer

**IP EVO** is designed to make installations as straightforward as possible, offering the following benefits:

- ability to add, remove or change system users
- option to **modify access PIN** codes for users
- **full remote management** via the IP EVO app (including web interface)
- installation **without the need for a dedicated server unit**
- support for an **unlimited number** of door stations
- support for an **unlimited number** of internal units
- power supply via **PoE** or local power



REMOTE  
MANAGEMENT




FTP, UTP,  
OPTICAL FIBRE



EASY  
SETUP



PEER TO PEER  
/ NO SERVER

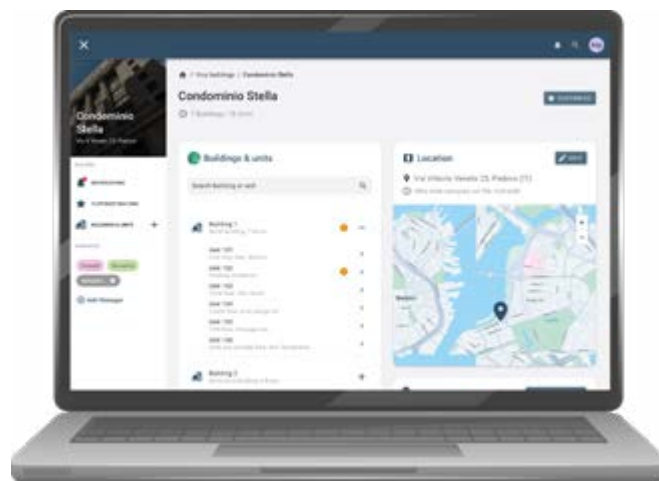

# Advantages for the end user

From the **end user's** perspective, IP EVO is the ideal solution for:

- HD audio and video quality
- guaranteed **cybersecurity**, supported by a dedicated chip in the door station and AWS (Amazon Web Services) server cloud developed and managed by Farfisa
- reliable operation of the video intercom even **without an active network connection**
- simultaneous conversations and calls with two-way communication
- up to 8 devices per internal unit
- **accessibility** features include voice prompts, wide angle camera and audio/visual signalling
- **Alexa** voice assistant compatibility



TOP AUDIO VIDEO



AUDIO/VISUAL SIGNALLING



POWERED BY AWS



BRAILLE



ALWAYS ON



MASKED PASSWORD



REMOTE MANAGEMENT



WIDE ANGLE CAMERA




DATA ENCRYPTION



MULTI-LANGUAGE VOICE PROMPT



**Up to 8 devices (video intercoms, smartphone, tablet, digital voice assistant..) available with each internal unit.**

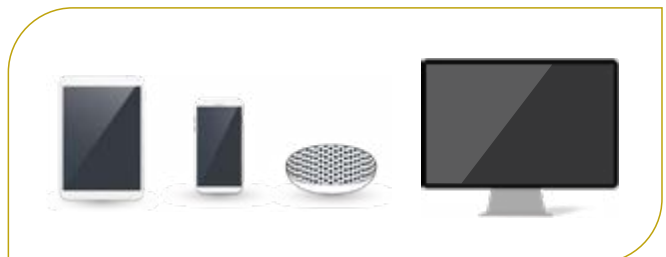





TORX  
SCREWS



AUDIO VISUAL  
SIGNALLING



5MPX  
LENS



FLUSH  
MOUNTING



WIDE ANGLE  
CAMERA



MULTI-LANGUAGE  
VOICE PROMPT



STAINLESS  
STEEL



SURFACE  
MOUNTING



IP45



IK08

# CONNECTO

anyone, anytime, anywhere



## TD1000CN

### Complete door station

- Aisi 316L stainless steel plate
- 5Mpx camera
- 16 stainless steel buttons, backlit with white LEDs
- Graphic display
- Multi-language voice prompt
- Ready fo RFID module
- PoE or 13Vac power supply
- Ethernet connection or Wi-Fi
- Flush mounting
- Dim. 170 x 371 x 2 mm



- 290C/0** → **Rain shelter** for surface mounting, made in steel. Dim: 174 x 376 x 83 mm



- PRS210** → 15 VA, 13Vac **transformer**. Dim: 3 DIN modules

- DGS-1005P** → 4 port- Gigabit PoE **switch** (10/100/1000Mbps), power up to 60W





MODULARITY

WIDE ANGLE  
CAMERA5MPX  
LENSFLUSH  
MOUNTINGAUDIO VISUAL  
SIGNALLINGMULTI-LANGUAGE  
VOICE PROMPT

BRAILLE

SURFACE  
MOUNTING

IP55



IK08

# ALBA

W E L C O M E I T A L I A N B E A U T Y



### CV1000AB

#### Audio-video module

- Brushed anodised aluminium plate
- 5Mpx camera
- Up to 4 call buttons, backlit
- Multi-language voice prompt
- PoE or 13Vac power supply
- Dim: 99 x 91 x 37 mm




### CT2138AB

#### Additional module buttons

- Up to 8 call buttons, backlit
- Auto programming
- Dim: 99 x 91 x 37 mm


#### Accessories



**AB20** → **Single button** blank module in aluminum for CV1000AB or CT2138AB. Dim: 90 x 22 mm



**AB21** → Single or double **call button**, for CV1000AB or CT2138AB. Braille is embossed to make it recognisable to visually impaired users. Backlit with white LED. Dim: 90 x 22 mm



**HDR 30-24** → 24Vdc / 630mA **power supply**. Dim: 1 DIN module

**DGS-1005P** → 4 port- Gigabit PoE **switch** (10/100/1000Mbps), power up to 60W



**PD2100AB**

**Digital keypad module**

- Brushed anodised aluminium plate
- Backlit buttons
- Programming: manual or Bluetooth
- Up to 1000 codes management
- Provided with 2 internal relays
- Dim: 99 x 91 x 37 mm



**FP51SAB**

**Proximity reader module**

- RFID technology and Bluetooth
- via tag/card or through app
- Dim: 99 x 91 x 37 mm



**DD2140AB**

**Display and electronic index module**

- 3.5" LCD graphic display
- Up to 1000 contacts management
- Dim: 99 x 91 x 37 mm



**AB00**

**Blank module**, to be used to complete the panel composition

- Brushed anodised aluminium plate
- Dim: 99 x 91 x 37 mm



**AB50**

**Street number module**

- Dim: 99 x 91 x 37 mm

**Accessories**



**FP11/10** → 10 **cards** for FP51SAB, in white plastic. ISO standard format.



**FP12/10** → 10 blue and white **tags** for FP51SAB with keyholder.

*Installation elements*



**Front frame**

Code	Front frame for	Dim. mm.
<b>AB61</b>	1 Module	124x124x9
<b>AB62</b>	2 Modules	124x215,5x9
<b>AB63</b>	3 Modules	124x307x9



**Module frame** in die-cast aluminium

Code	Module frame	To be mounted with	For flush mounting, add	Dim. mm.
<b>AB71</b>	1 Module	AB61	SC1	119x119x36
<b>AB72</b>	2 Modules	AB62	SC2	119x210x36
<b>AB73</b>	3 Modules	AB63	SC3	119x302x36



**Box for surface mounting**, in painted steel

Code	Box for	Dim. mm.
<b>AB81S</b>	1 Module	125x125x30
<b>AB82S</b>	2 Modules	125x216,5x30
<b>AB83S</b>	3 Modules	125x308x30



**Rain shelter.** Optional, for surface mounting, in painted steel

Code	Rain shelter for	Dim. mm.
<b>AB91</b>	1 Module	140x137x62
<b>AB92</b>	2 Modules	140x229x62
<b>AB93</b>	3 Modules	140x320x62
<b>AB94</b>	4 Modules (2 double joined)	264x229x62
<b>AB96</b>	3 Modules (2 triple joined)	264x320x62



**Box** for flush mounting, in painted steel

Code	Box for	Dim. mm.
<b>SC1</b>	1 Module	122x119x45
<b>SC2</b>	2 Modules	122x210x45
<b>SC3</b>	3 Modules	122x302x45



**EC733** → Optional **cable** for connecting modules, required for the sequential use of call buttons.

**MD81 - MD82 - MD83** → **Rain shelter modules** for flush mounting for 1, 2 and 3 modules.







HANDS-FREE



LCD 7"



HD RESOLUTION



SOFT TOUCH

DIGITAL VOICE  
ASSISTANTSSURFACE  
MOUNTING

ACCESSIBILITY

SIMPLE INSTALL  
AND SETUP

# SE77E

## ITALIAN VIEW

**SE4000****Wi-Fi video intercom**

- Hands-free
- 7" LCD screen
- Soft touch and backlit icons
- PoE or 13 Vac power supply
- Ethernet or Wi-Fi connection
- Dim: 194 x 157 x 25 mm



**TA4260** → **Table adaptor** in transparent white methacrylate.  
Provided with 2.4 cable. Dim. 150 x 149 x 125 mm



**PRS210** → 15 VA, 13Vac **transformer**. Dim: 3 DIN modules

**DGS-1005P** → 4 port- Gigabit PoE **switch** (10/100/1000Mbps),  
power up to 60W

**SE4000ABW**

**Videokit** includes: complete CV1000AB door station with 1 button +  
SE4000 video intercom + 1 switch PoE

# System software

## **CNUS01 / CNUS10 / CNUS50 / CNUS100**

**Licence** for 1, 10, 50 or 100 users to interface mobile devices and PCs (required when the apartment does not have a SE4000 monitor)



## **CNAW**

**Licence** for the system management through web interface, functions:

- creation of residential units
- bulk sending of user invitation emails
- user management, including editing and removal
- import address directories from external files



# Web concierge

## CNPDX1 - CNPDX5

**Web based concierge solution**, available in 1 and 5 licence versions.


Key features:

- call monitoring from door stations to internal units (both physical and virtual)
- pass-through functionality
- time-slot scheduling
- call hold function
- during "hold" mode, the operator can communicate with internal user, including video
- call forward from door station to internal unit
- event log
- missed call management
- door opening
- functions available via web browser (PC and Mac compatible) or through IP EVO app when used on the go.
- queued call management with pop up views of all active cameras



Each **licence** can be used across multiple devices and operators, operating in a shared mode rather than independently.

With concierge integration, the system can efficiently manage **multiple sites**.

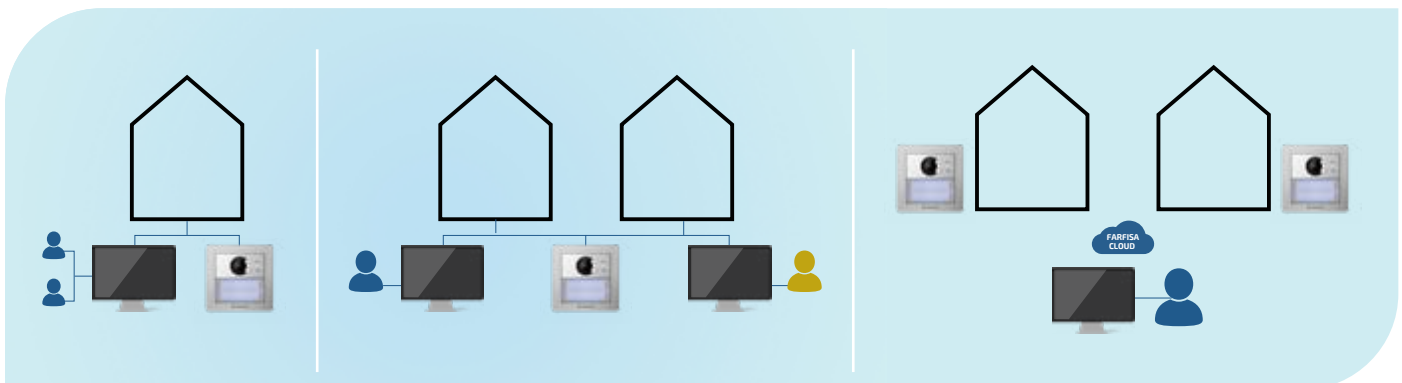


Concierge with same operation mode.  
**Only one license required.**

Concierge with independent operation modes.  
**Separate licenses needed..**

Concierge for the remote management of **multiple sites**.


## Installation without cabling

Example of an installation without cabling between the door station and the internal unit. Calls are forwarded through the cloud server.

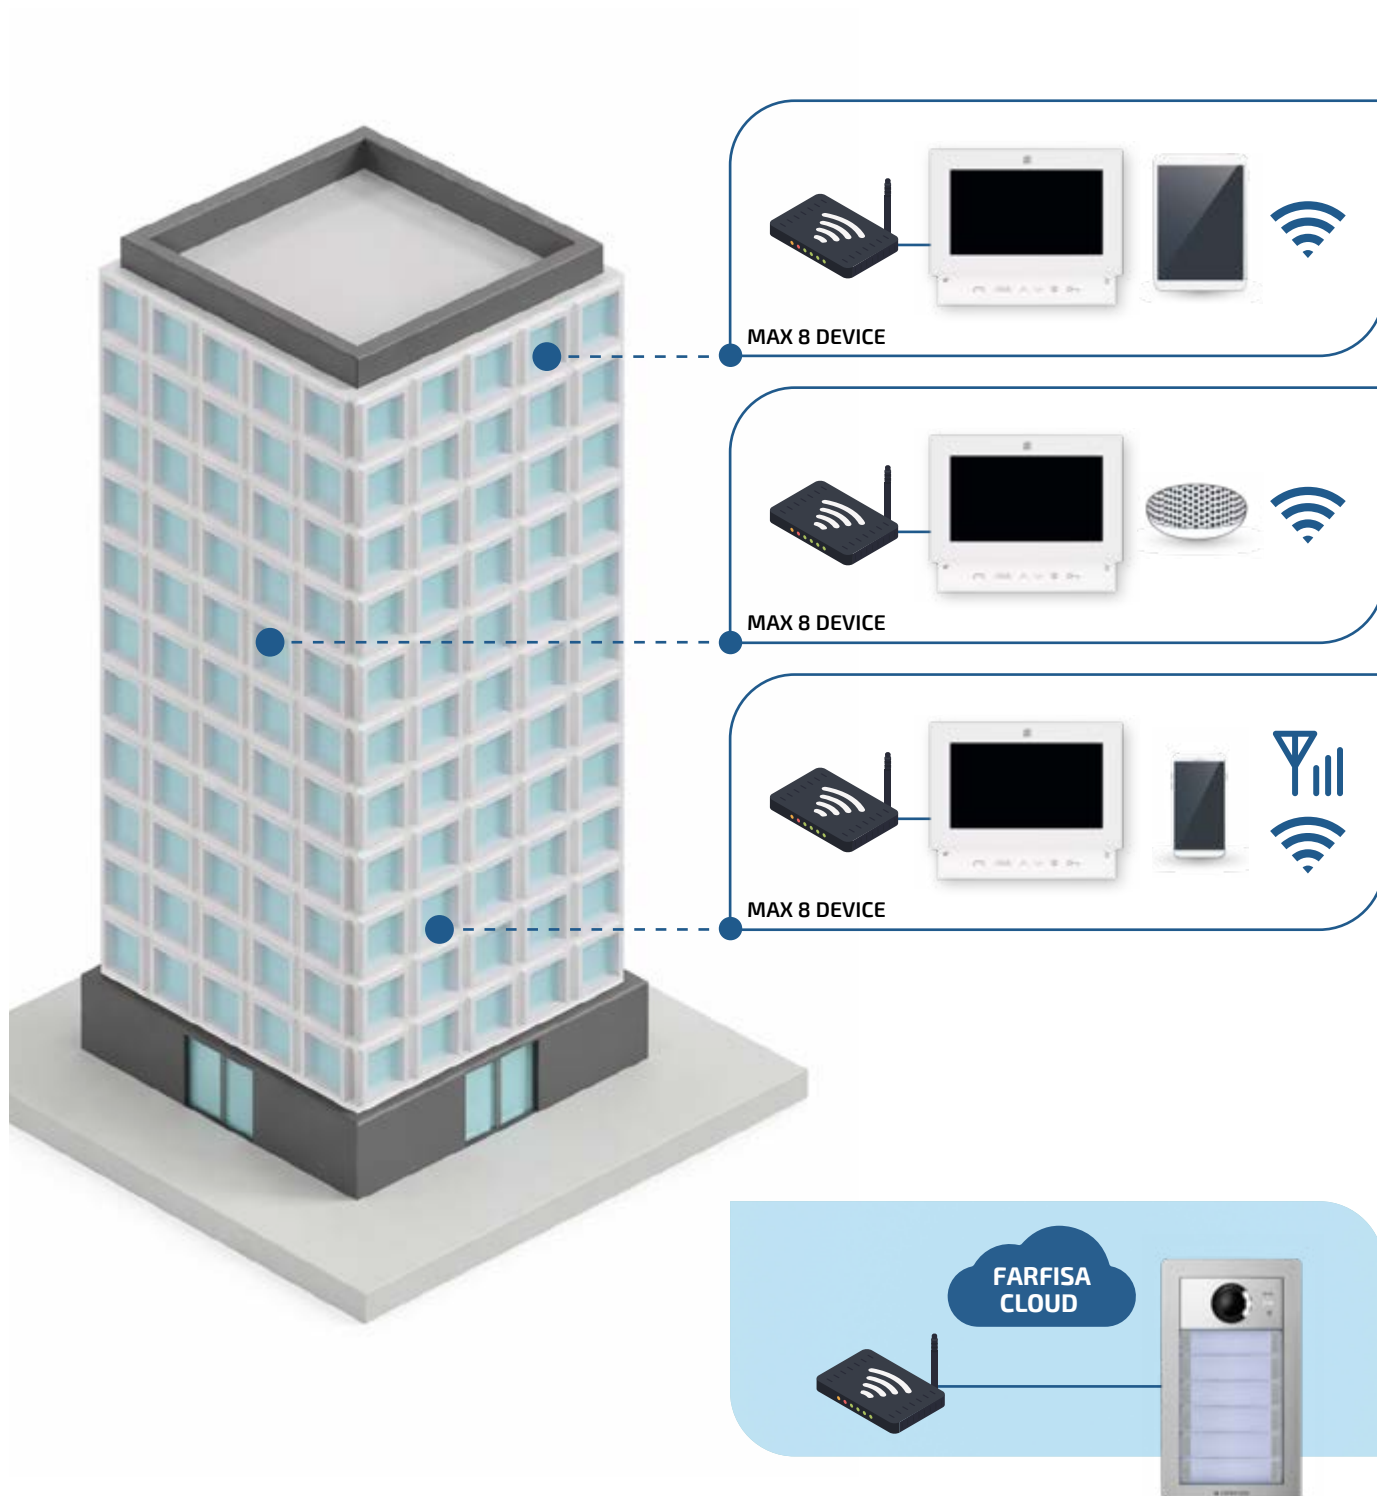


## Installation with PoE switch and structured cabling

Example of a system using a PoE switch and structured cabling. Communication between the door station and internal units is maintained even without an internet connection.

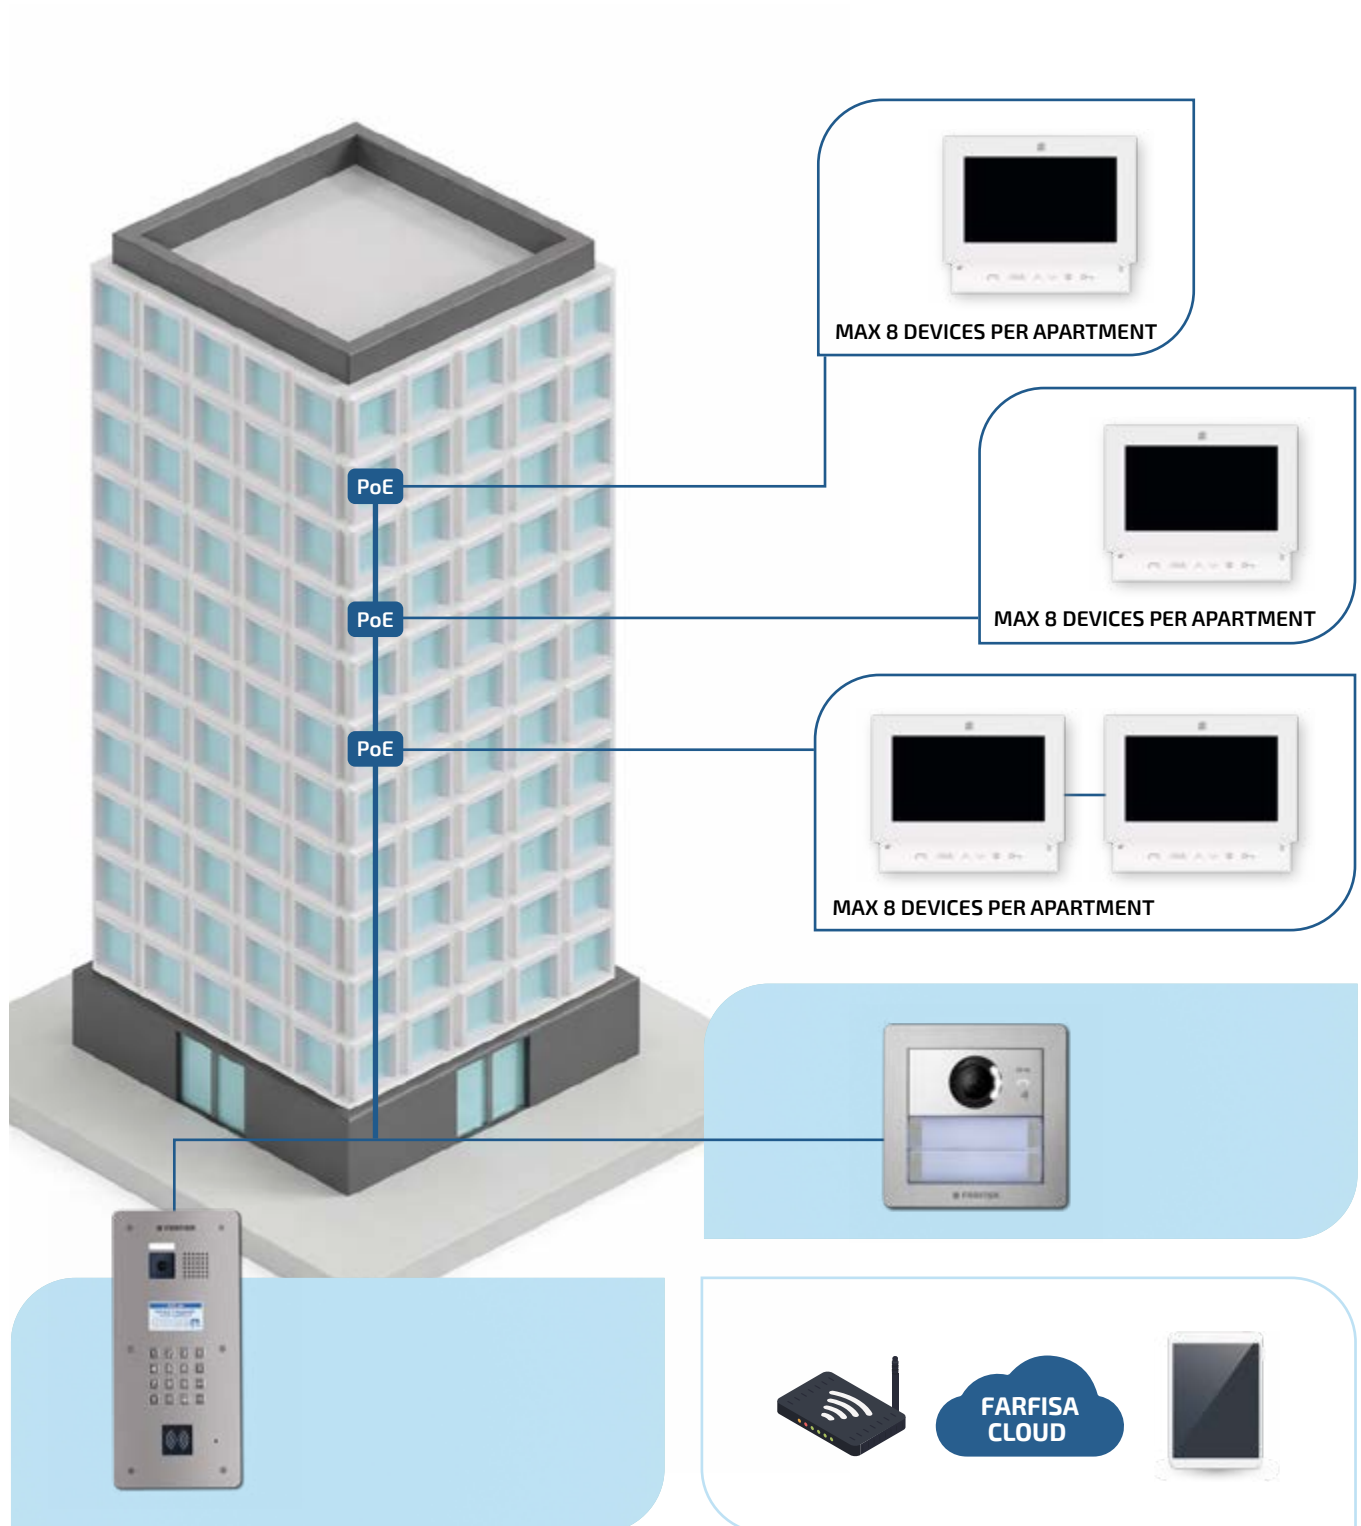


## Installation without internal video units

Example of a system with no internal video unit, the calls take place between the door station and smart devices.

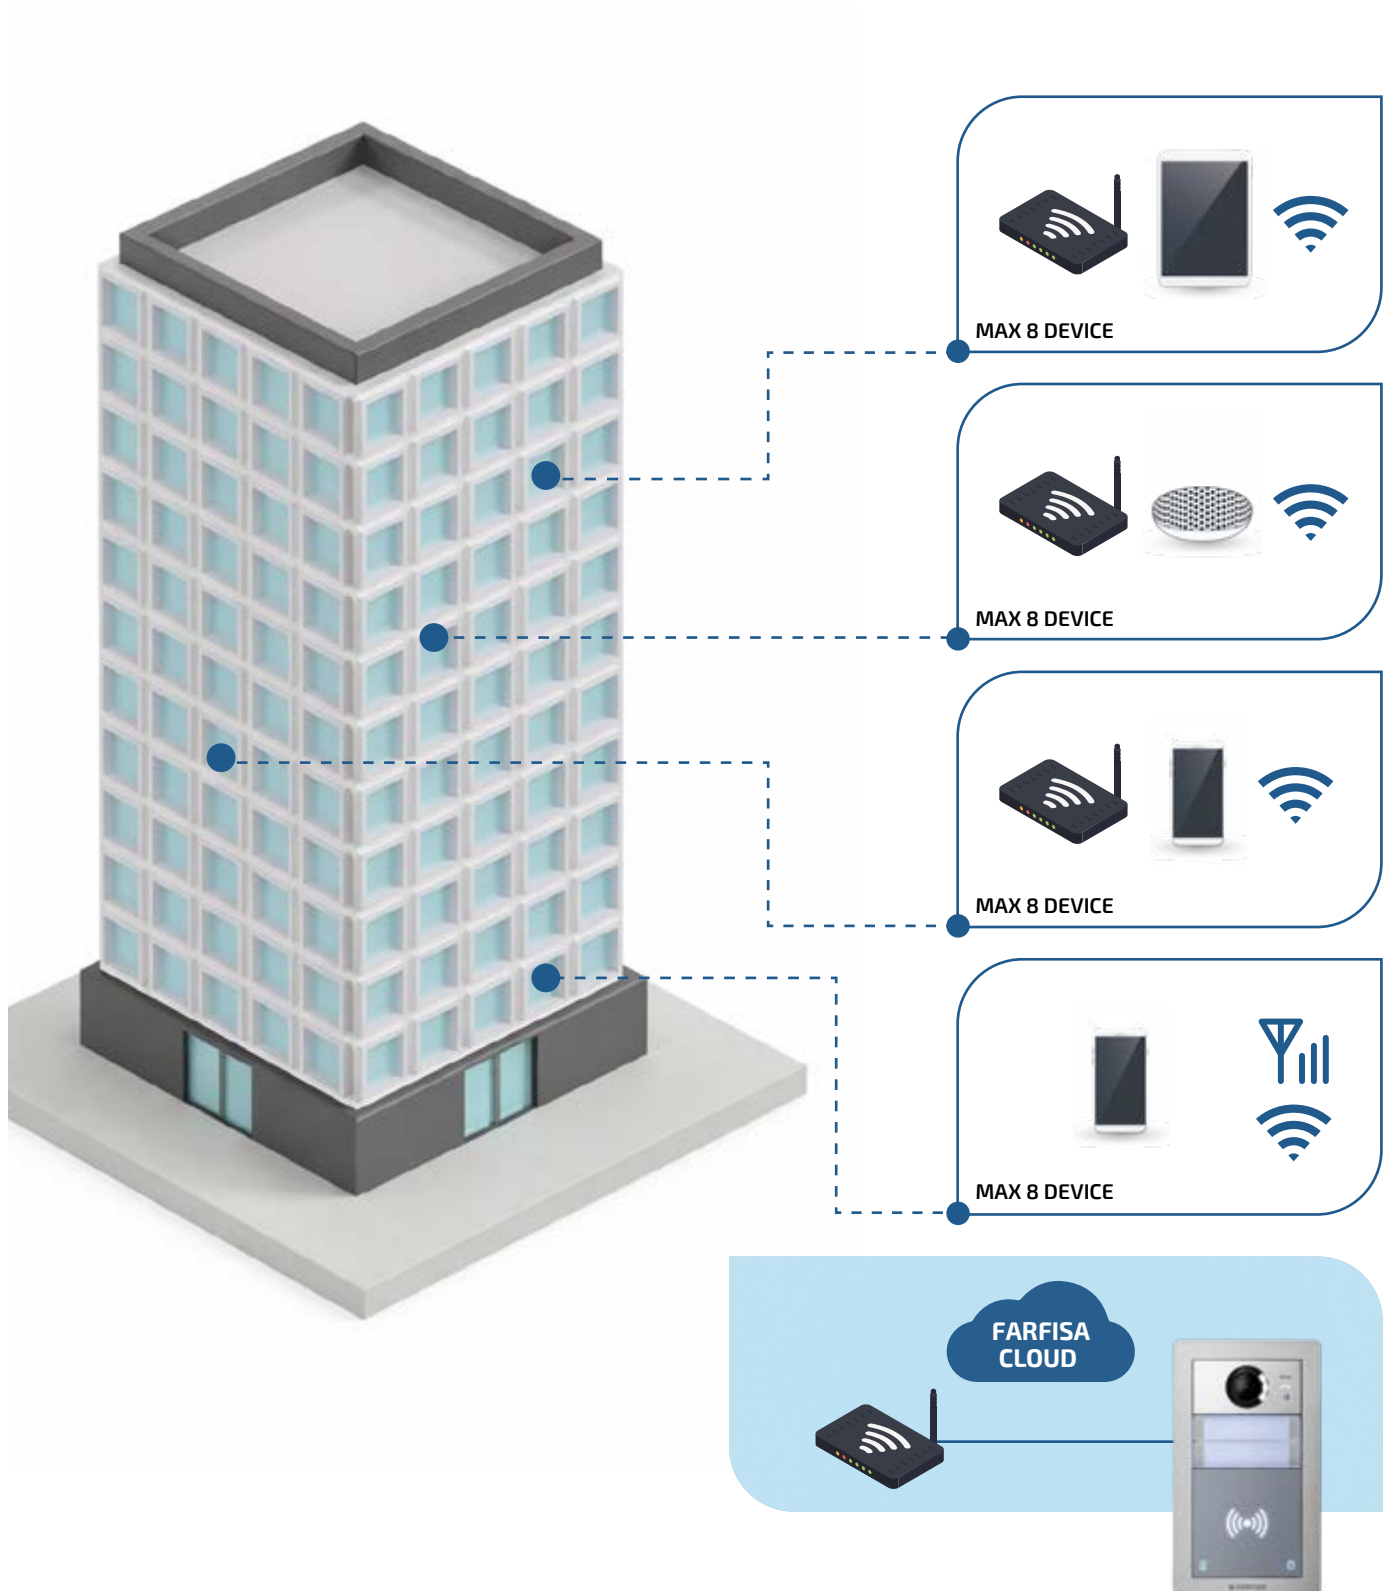


# Product dimensions

→ **SETTE** / CODE **SE4000**

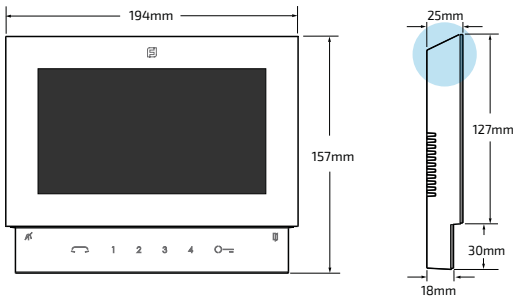

→ protrusion  
25 mm


→ **CONNECTO** / CODE **TD1000CN** / CODE **290C/0**

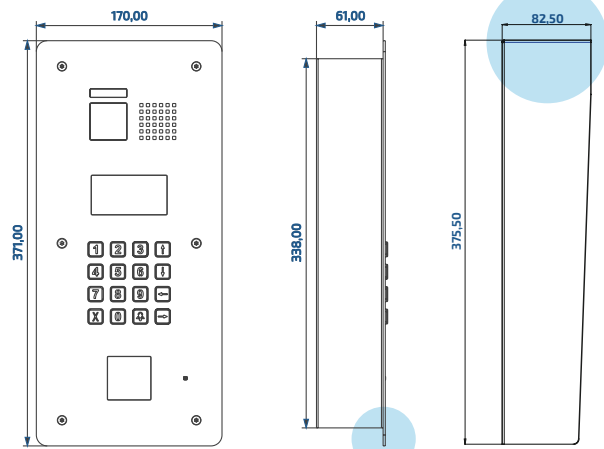


→ protrusion  
3 mm

→ protrusion  
82,5 mm

→ **ALBA** / CODE **CV1000AB**

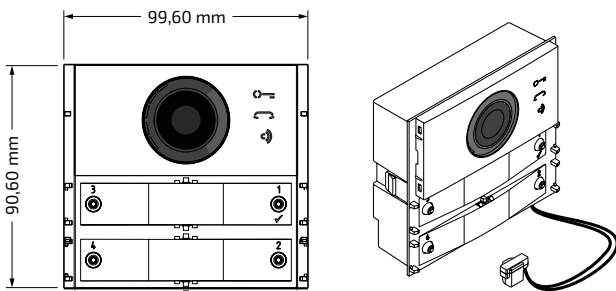


→ protrusion  
11 mm

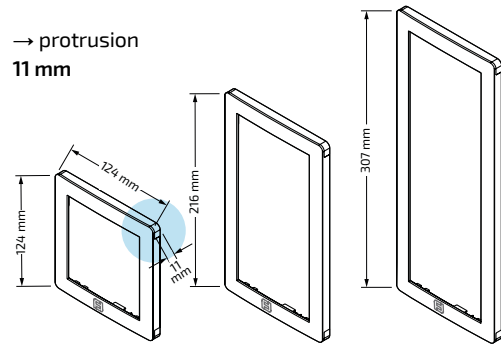

AB61

AB62

AB63

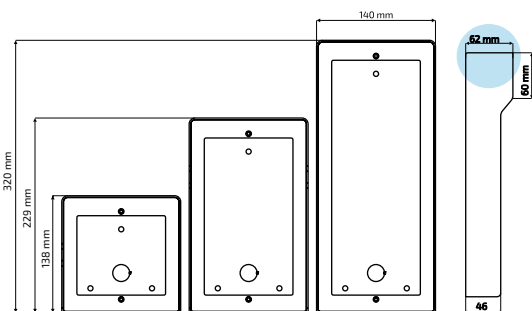


AB91

AB92

AB93

→ protrusion  
62 mm

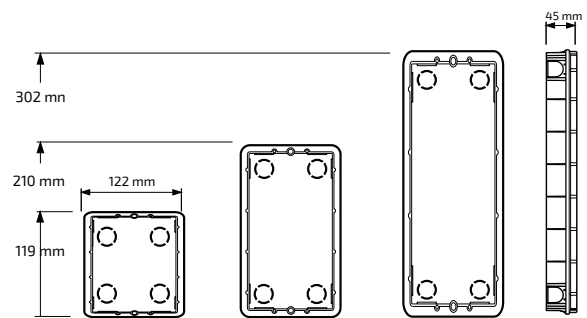





















SC1

SC2





















SC3

Composition Alba video door station, call on single row

		NUMBER OF CALLS																																			
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34		
A/V MODULE	 <b>CV1000AB</b>	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
BLANK MODULE / STREET NUMBER	 <b>AB00/AB50</b>															1	1	1	1						2	2	2	2	1	1	1	1					
BUTTON MODULE	 <b>CT2138AB</b>			1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8	8		
CALL BUTTON	 <b>AB21</b>	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34		
	 <b>AB20</b>	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1			
BACK BOX*	 <b>SC1</b>	1	1																																		
	 <b>SC2</b>			1	1	1	1					2	2	2	2																						
	 <b>SC3</b>						1	1	1	1						2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3		
RAIN SHELTER*	 <b>AB91</b>	1	1																																		
	 <b>AB92</b>			1	1	1	1																														
	 <b>AB93</b>						1	1	1	1																											
	 <b>AB94</b>										1	1	1	1																							
	 <b>AB96</b>															1	1	1	1	1	1	1	1														
MODULE FRAME	 <b>AB71</b>	1	1																																		
	 <b>AB72</b>			1	1	1	1					2	2	2	2																						
	 <b>AB73</b>						1	1	1	1						2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	
FRONT FRAME	 <b>AB61</b>	1	1																																		
	 <b>AB62</b>			1	1	1	1					2	2	2	2																						
	 <b>AB63</b>						1	1	1	1						2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	
CABLE	 <b>EC733</b>										1	1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2		

\* Back boxes are to be chosen in case of flush mounting, rain shelters in case of surface mounting

**Composition Alba video door station, call on double row**

		NUMBER OF CALLS		2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68		
A/V MODULE	 <b>CV1000AB</b>	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
BLANK MODULE / STREET NUMBER	 <b>AB00/AB50</b>																	1	1	1	1					2	2	2	2	1	1	1	1						
BUTTON MODULE	 <b>CT2138AB</b>			1	1	1	1	2	2	2	2	2	3	3	3	3	4	4	4	4	5	5	5	5	6	6	6	6	7	7	7	7	8	8	8	8	8	8	
CALL BUTTON	 <b>AB21</b>	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34				
	 <b>AB20</b>	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1		3	2	1	
BACK BOX*	 <b>SC1</b>	1	1																																				
	 <b>SC2</b>			1	1	1	1						2	2	2	2																							
	 <b>SC3</b>							1	1	1	1					2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
RAIN SHELTER*	 <b>AB91</b>	1	1																																				
	 <b>AB92</b>			1	1	1	1																																
	 <b>AB93</b>							1	1	1	1																												
	 <b>AB94</b>														1	1	1	1																					
	 <b>AB96</b>																	1	1	1	1	1	1	1	1														
MODULE FRAME	 <b>AB71</b>	1	1																																				
	 <b>AB72</b>			1	1	1	1						2	2	2	2																							
	 <b>AB73</b>							1	1	1	1						2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
FRONT FRAME	 <b>AB61</b>	1	1																																				
	 <b>AB62</b>			1	1	1	1						2	2	2	2																							
	 <b>AB63</b>							1	1	1	1						2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	
CABLE	 <b>EC733</b>												1	1	1	1	1	1	1	1	1	1	1	1	2	2	2	2	2	2	2	2	2	2	2	2	2		

\* Back boxes are to be chosen in case of flush mounting, rain shelters in case of surface mounting

Diagrams in this catalogue are a simple reference. For detailed installation schematics, please see the specific technical manual.

Due to the continuous technological evolution, Farfisa reserves the right to change the specifications of any item and range composition without prior notice.

**Cod: IP EVO 01/26**

→ design:  
**simonegrassi.eu**  
**serena picchio**

→ print:  
**BBOLD SRL, Monsano (AN)**

→ photo:  
**Mom Studio**  
**Maurizio Paradisi**  
**Paolo Zitti**  
**Giorgio Manzotti**  
**Nicolò Cupido**  
**Paolo Savino**

Copyright © 2026:  
**ACI srl**  
Via E. Vanoni, 3  
60027 Osimo AN  
ITALY  
Tel. (+39) 071.7202038  
Fax (+39) 071.7202037  
**info@farfisa.com**  
**www.farfisa.com**



Certified corporate quality system



European mark for the conformity to EEC requirements.





**ACI srl**

Via Ezio Vanoni, 3  
60027 Osimo AN - ITALY  
Tel. (+39) 071.7202038  
Fax (+39) 071.7202037  
**[info@farfisa.com](mailto:info@farfisa.com)**

